

Cross-Ministerial Strategic Innovation Promotion Program (SIP) /
Automated Driving for Universal Services (SIP-adus) /
Research and Study of Common Reference Point (CRP) in High-Definition Map

FY2020 Report (Summary)

Mitsubishi Research Institute, Inc.

Background / Issues


【Background】

- It is not realistic to expect that all High-Definition Maps (HD Maps) for automated driving will be unified.
 - Each of HD Maps is based on different mapping rules (method, accuracy, density, period of survey, error range, etc.). Therefore, there is always possibility of slight gap between maps.
- It is necessary to create method of precise representation of relative location by which vehicles and other entities can have common recognition.

【Issues】

- Although there is an international standard for the representation of precise relative location, there are no common rules for reference points necessary for common recognition among different maps.
- In this study the needs of the rule-based reference points (Common Reference Point; CRP) for automated driving are organized and the functional requirements and Implementation Items of CRP are examined.

<Examples of location representation using reference point>

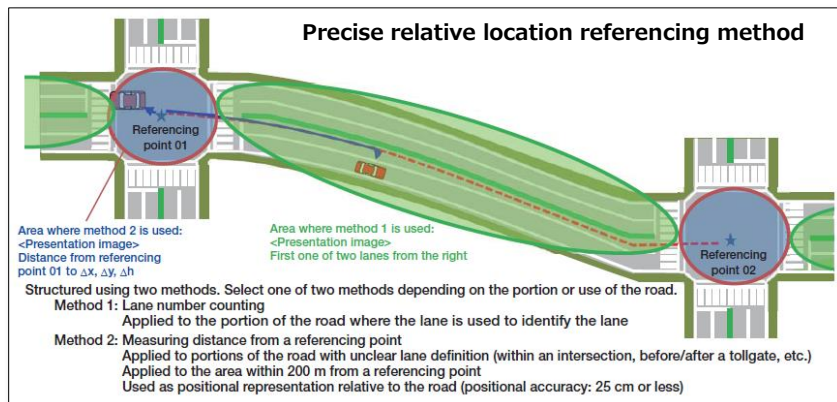


<p>Method1 : Lane number counting</p>	<p>Identifies the longitudinal location by using reference points or others installed at both ends of intersection and specifying the lane number.</p> <p>(e.g.); Lane No.X, XXm from CRP-01 to -02</p>
<p>Method2 : Measuring distance from referencing point</p>	<p>Identifies detailed location by the distance from reference point, etc. at intersections</p> <p>(e.g.); XXm east, XXm north from CRP-01</p>

*1 Geospatial Information: Information which includes location as an attribute (e.g. dropped objects, damaged areas, existence of other vehicles, etc.)
 *2 Precise relative location referencing method: method of representing location by its relative distance from reference point, not by absolute location

(Reference) Utility of CRP


- The purpose of CRP is to transmit the relative locations of the "geospatial information"*¹ represented on each map, not to align different maps.

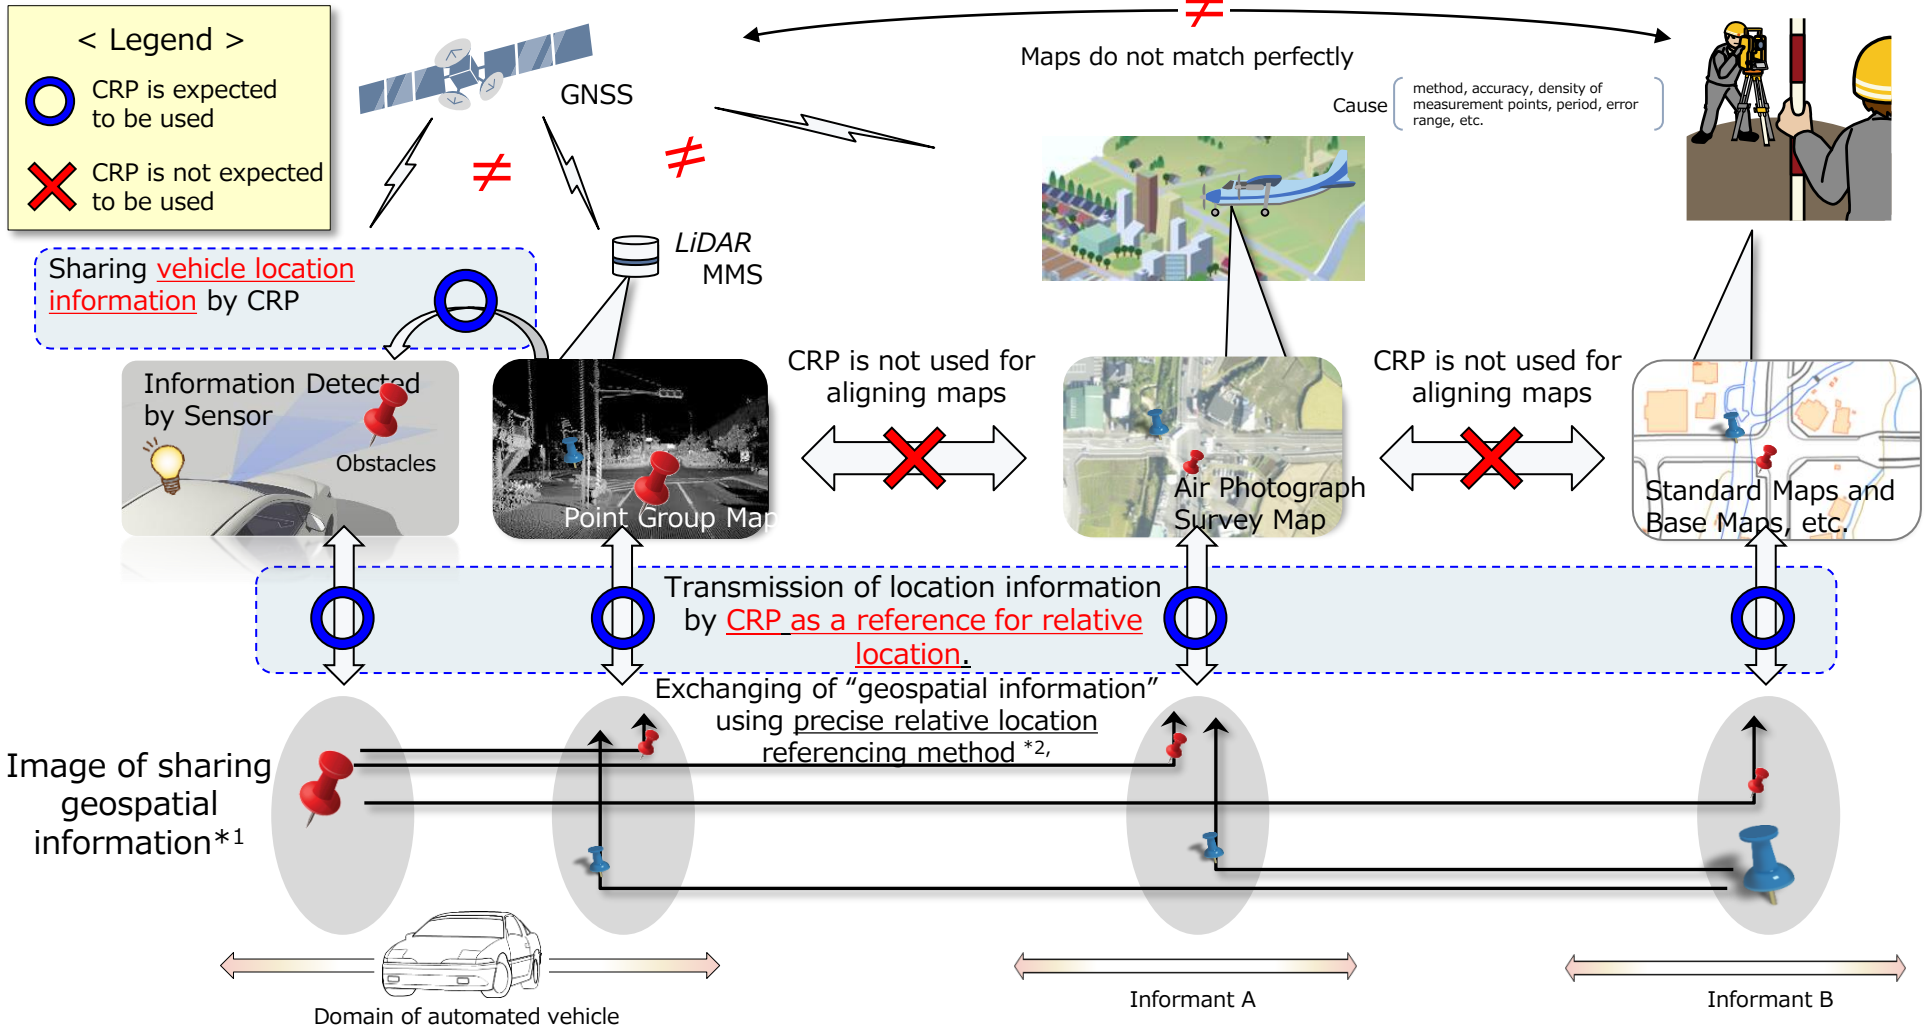

Source) "Air Photograph Survey Map", "Standard Maps and Base Maps": Tile-based GSI map made by Geospatial Information Authority of Japan
 "Point Group Map": MLIT "Collection of 3D road data by on-vehicle sensing devices has started - to expedite the examination of special vehicle traffic permits -" (<https://www.mlit.go.jp/common/001247574.pdf>, taken on 24/2/2021)
 Other information: made by Mitsubishi Research Institute

(cf.) LO, CRP and AP

- CRP (virtual object) is placed on the map as a reference point for relative location. The location of CRP is defined from real objects (AP) on the map. ⇒①
- In automated driving, LO (Localization Object) is used to identify the vehicle location on a map. The vehicle can recognize the location information (e.g., dropped objects, traffic congestion, vehicle location, etc.) by CRP. ⇒②

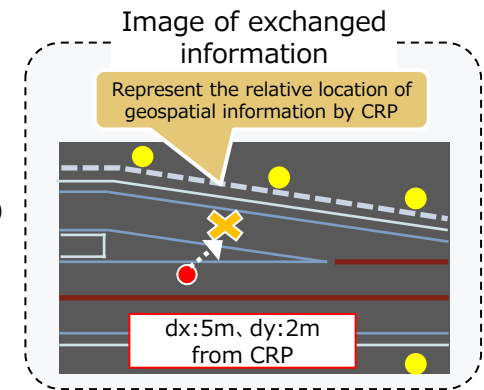


① Installation of CRP

	AP (Anchorage Point)
Definition	Point used to define CRP location
Real/Virtual	Real
Visibility from Mobil Mapping System	Necessary
Visibility from Automated Vehicle	Unnecessary
Absolute Coordinate	About the same accuracy as the map where CRP is placed


	CRP (Common Reference Point)
Definition	Reference point used to represent the location of section/point
Real/Virtual	Virtual
Visibility from Mobil Mapping System	Unnecessary
Visibility from Automated Vehicle	Unnecessary
Absolute Coordinate	Depends on AP accuracy

② Automated Driving


	LO (Localization Object)
Definition	Point used to identify the location of vehicle on HD Map
Real/Virtual	Real
Visibility from Mobil Mapping System	Necessary
Visibility from Automated Vehicle	Necessary
Absolute Coordinate	Depends on the map where LO is placed

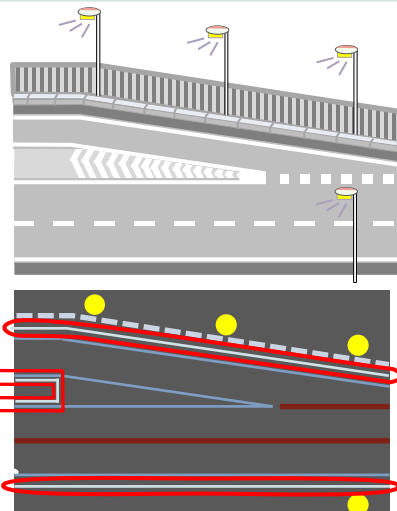

CRP is set based on a rule (e.g., centre of inscribed circle of AP)

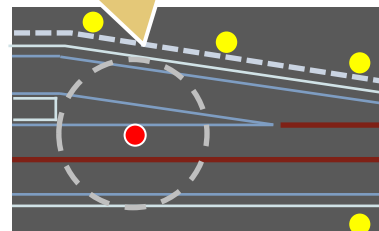

Automated vehicle recognizes LO (e.g., road light) and grasps the distance and relative location to the LO in real space.

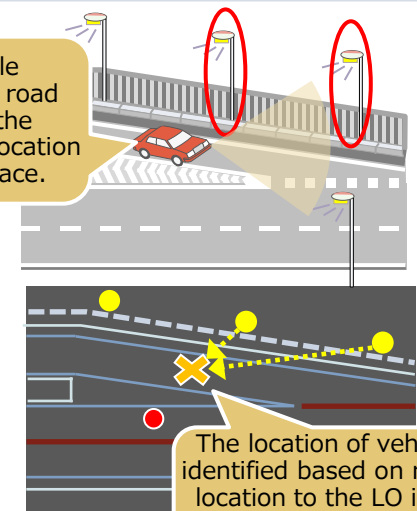

Topics and Results of this Study (Summary)

Topics	Study Results	Page
1. Needs for exchanging location information by CRP	According to the phases of automated driving, needs for exchanging location information by CRP are organized in 3 steps.	6
	Use case examples in which CRP is utilized at each step are organized. <ul style="list-style-type: none"> ➤ Step1 (Dropped objects and traffic congestion) ➤ Step2 (Merging assistance in expressway) ➤ Step3 (Intersection of local road) 	7~9 (7) (8) (9)
2. Functional requirements and implementation items regarding CRP	Functional requirements of CRP expected at each step are organized. (Method of location representation / Relative accuracy of information / Areas where CRP is required / Required accuracy of map)	10
	CRP-related implementation items at each step are organized. (Relationship between objects used as AP / Installation method of CRP / Management method of CRP)	10 (10~ 11)
3. Case study	Case studies for the use cases of CRP are organized, hypothesizing the demonstration experiment under SIP-adus <ul style="list-style-type: none"> ➤ Step1 (Dropped objects and traffic congestion): Road traffic information by lane ➤ Step2 (Merging assistance in expressway): Merging assistance information 	14 (15) (16)


* This study is a technical study. This study does not determine the operation of CRP or the method of the demonstration experiment itself.

1. Needs for Exchanging Location Information by CRP

- As the automated driving system gets implemented, the situation where common recognition between different maps is required is expected to change.
- The needs assumed to arise in each phase of automated driving are organized.

*CRP use cases to be implemented will be studied considering the demonstration experiments based on the case studies.

*The utilization of CRP in the situation other than automated driving will also be considered in the future.

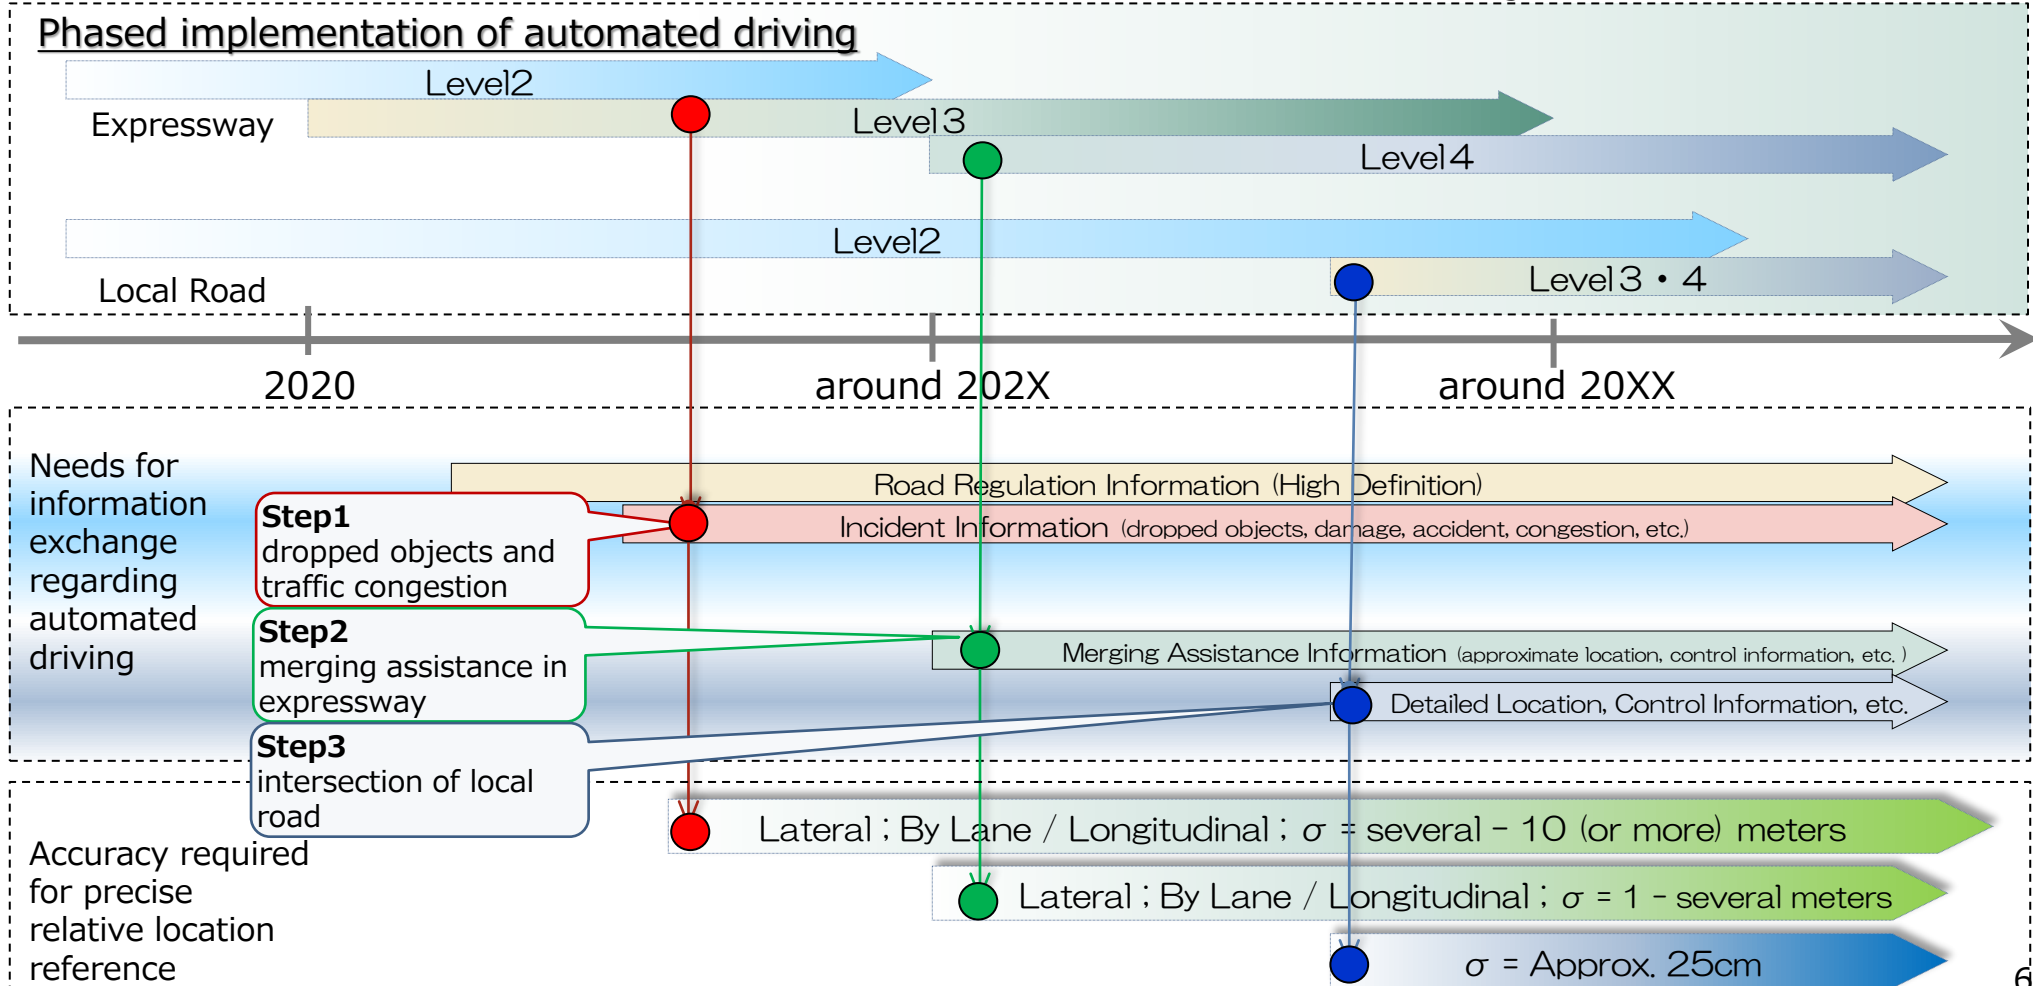


Step1 (Dropped Objects and Traffic Congestion)


(Example) d-3. Driving assistance based on traffic congestion information*

● : Reference point (CRP)


① Traffic congestion ahead of Car A in its lane.

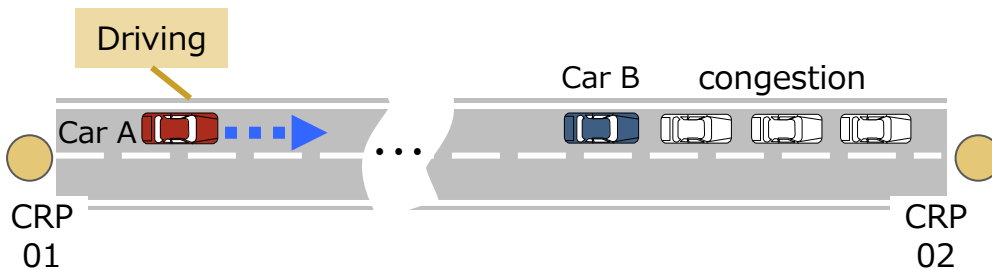

② Information about congestion obtained by vehicle in congestion (Car B) is transmitted to Car A.

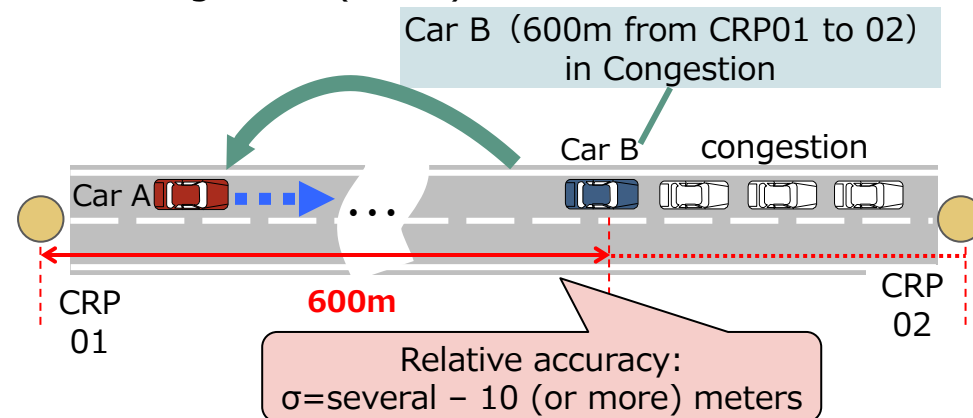

③ Car A changes lanes in advance based on the information transmitted from Car B.

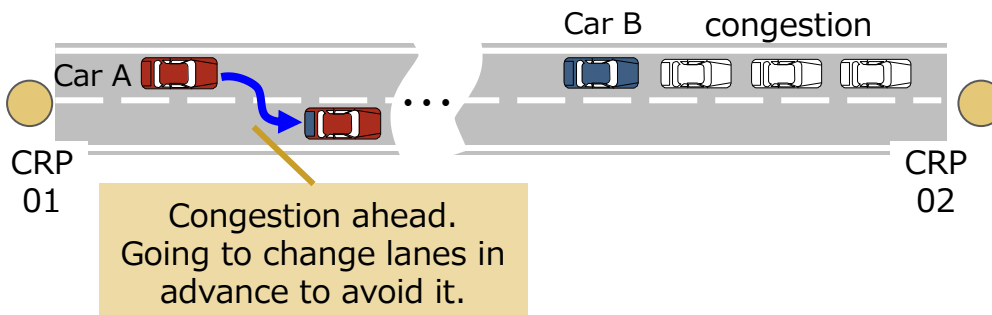

Car A **changes lanes in advance**, not just before the congestion. It is assumed that **the standard deviation (σ) of relative accuracy of information can be several - 10 (or more) meters.**

(Even if the information on the location where the congestion starts (600m) is incorrect by about 50m, the way to control Car A will be the same: "Change lanes from 500m ahead of congestion.")

* Reference: "SIP Use Cases for Cooperative Driving Automation - Activity Report of Task Force on V2X Communication for Cooperative Driving Automation in FY2019 - "



Step2 (Merging Assistance in Expressway)

(Example) a-1-3. Cooperative merging assistance with vehicles on the main lane by roadside control*

① Car A enters the main line from the merging lane.


● : Reference point (CRP)

② The location, speed and plan of the vehicle driving on the main line (Car B) are transmitted to Car A.

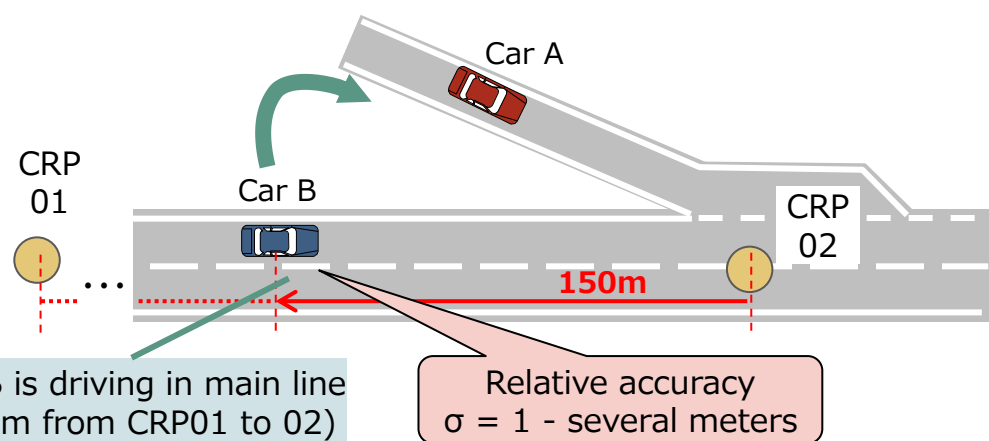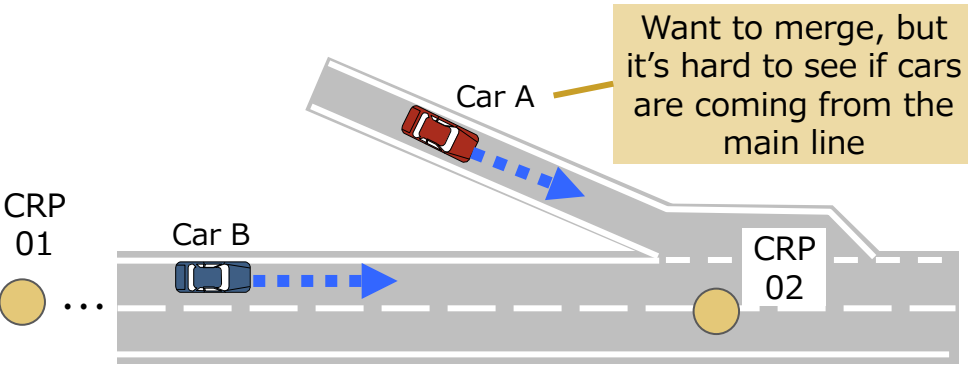

③ Car A adjusts its speed based on the information transmitted from Car B.

Car A **adjusts its speed a few seconds before the merging** based on the location of Car B. It is assumed that **σ of relative accuracy of information can be 1 - several meters.**

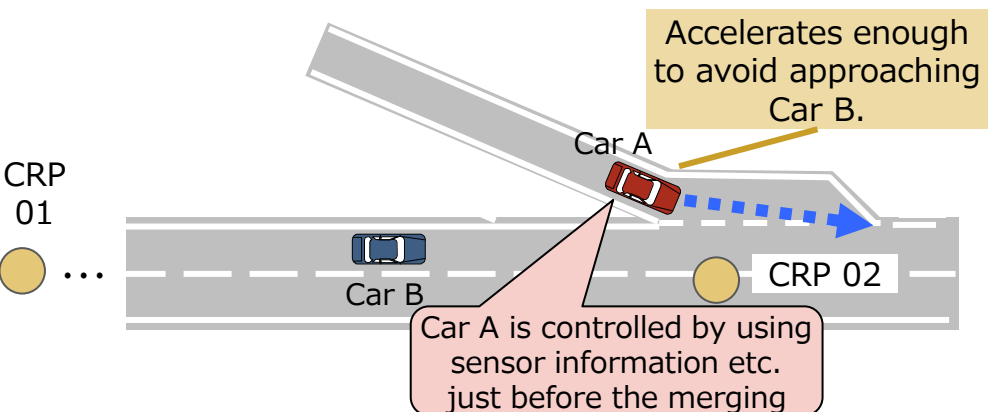

(Even if the information on Car B's location ($dx = -150m$) a few seconds before the merging is incorrect by about 5m, Car A's control remains the same: "Accelerate to XX km/h in a few seconds." Emergency control just before merging is based on sensor information, not on CRP-based location representation)
(Assumptions: Car A and Car B are time-synchronized.)


* Reference: "SIP Use Cases for Cooperative Driving Automation - Activity Report of Task Force on V2X Communication for Cooperative Driving Automation in FY2019 - "

Step3 (Intersection of Local Road)


(Example) a-3. Entry assistance from non-priority roads to priority roads during traffic congestion*

● : Reference point (CRP)


① Car A intends to turn right from non-priority road onto priority road.

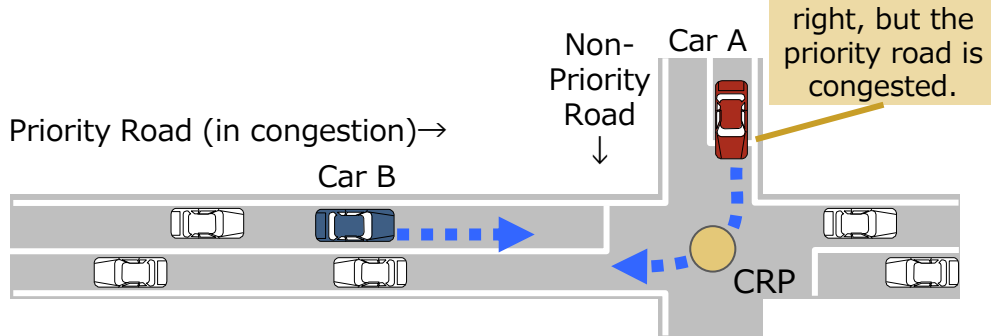

② Information on location and speed, and intention of entry is transmitted to Car A

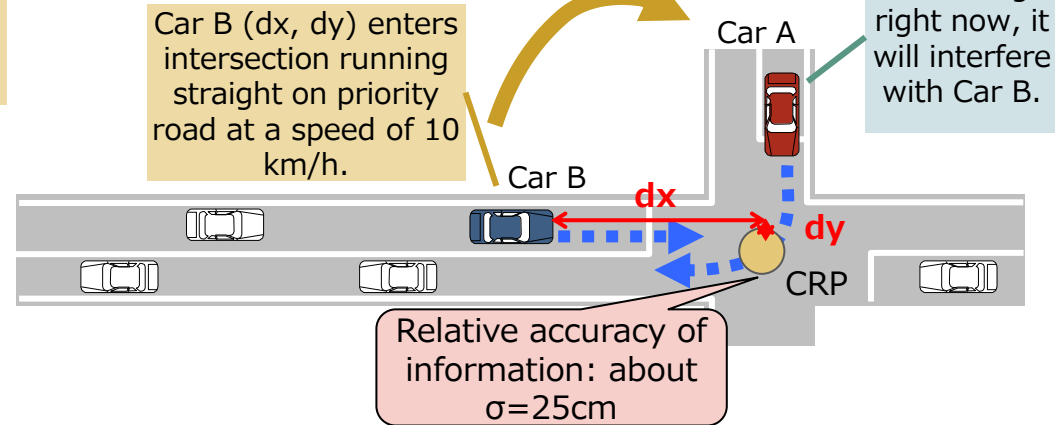

③ Car A decides whether to enter the intersection based on the information transmitted from Car B.

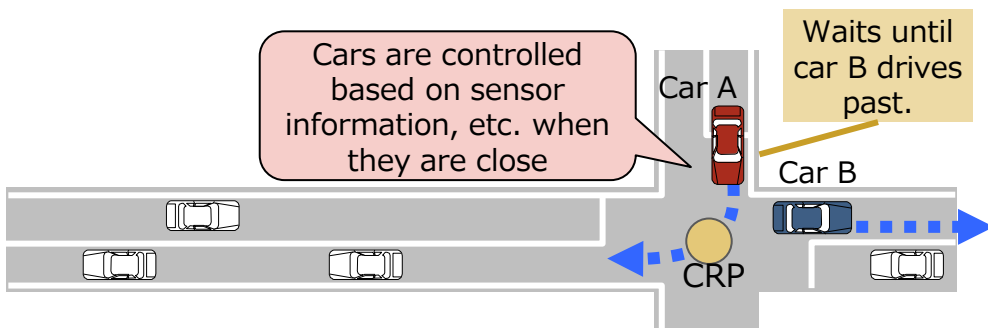

Car A is **controlled based on the real-time location information of Car B. sigma of relative accuracy of information is required to be sigma = 25cm.**

(When determining if Car A enters the intersection, the location of Car B must be represented with high accuracy. The cars are controlled based on both CRP-based location representation and sensor information.)

(Assumptions: Car A and Car B are time-synchronized.)

* Reference: "SIP Use Cases for Cooperative Driving Automation - Activity Report of Task Force on V2X Communication for Cooperative Driving Automation in FY2019 - "

2. Functional Requirements and Implementation Items of CRP

- It is effective to use CRP as reference point at any step of automated driving phase.
- The expected functional requirements differ according to the needs.

	Step1	Step2	Step3		
Functional requirements for each step)	Needs	Dropped objects and traffic congestion, etc.	Merging assistance in expressway	Intersection of local road	
	Method =	(Lane number counting) 1 Identify the longitudinal location by using reference points installed at both end and specify lateral location by showing the lane number.		(Measuring distance) 2 Identify detailed location by the distance from reference point.	
	Relative Accuracy of Information (σ)	several - 10 (or more) meters	1 - several meters	Approx. 25cm	
	Image of required number of control point (reference point)	Sufficient reference point \approx Required number of CRP			dense ↑ installation density ↓ sparse
		Every branch merging section of intersections and ICs			
		Major intersections and ICs	Areas where CRPs are installed should be determined as functional requirements determines		
Required map accuracy	Medium scale	Large scale	High Definition		

- Implementation items for each stage are organized, considering the functional requirements of CRP for each step.
- Examples of installation method of CRP are organized.

Implementation Items)	Implementation Items on CRP			
		(Issues of HD Maps)→	Determine requirements for mapping rules.	accuracy assurance
		Define how to install CRP.	(Issues of CRP)	common definitions
	Determine common names or IDs.		common names	


Step1; Identifying unique names or IDs to intersections and branch merging sections. (e.g. IDs used in existing network data)

Step2; Establishing rules for determining CRP locations in the field and on the graphic. (See "Group of Objects of AP")

Step3; Define the criteria for mapping for HD Maps so that the relative accuracy by CRP falls within $\sigma = 25$ cm.

Objects of AP / Installation and Management CRP

- In Step2 and Step3, the location of CRP is defined from real objects (AP) placed around CRP.
- How to install and manage CRP differs by each group classified according to requirements for AP.

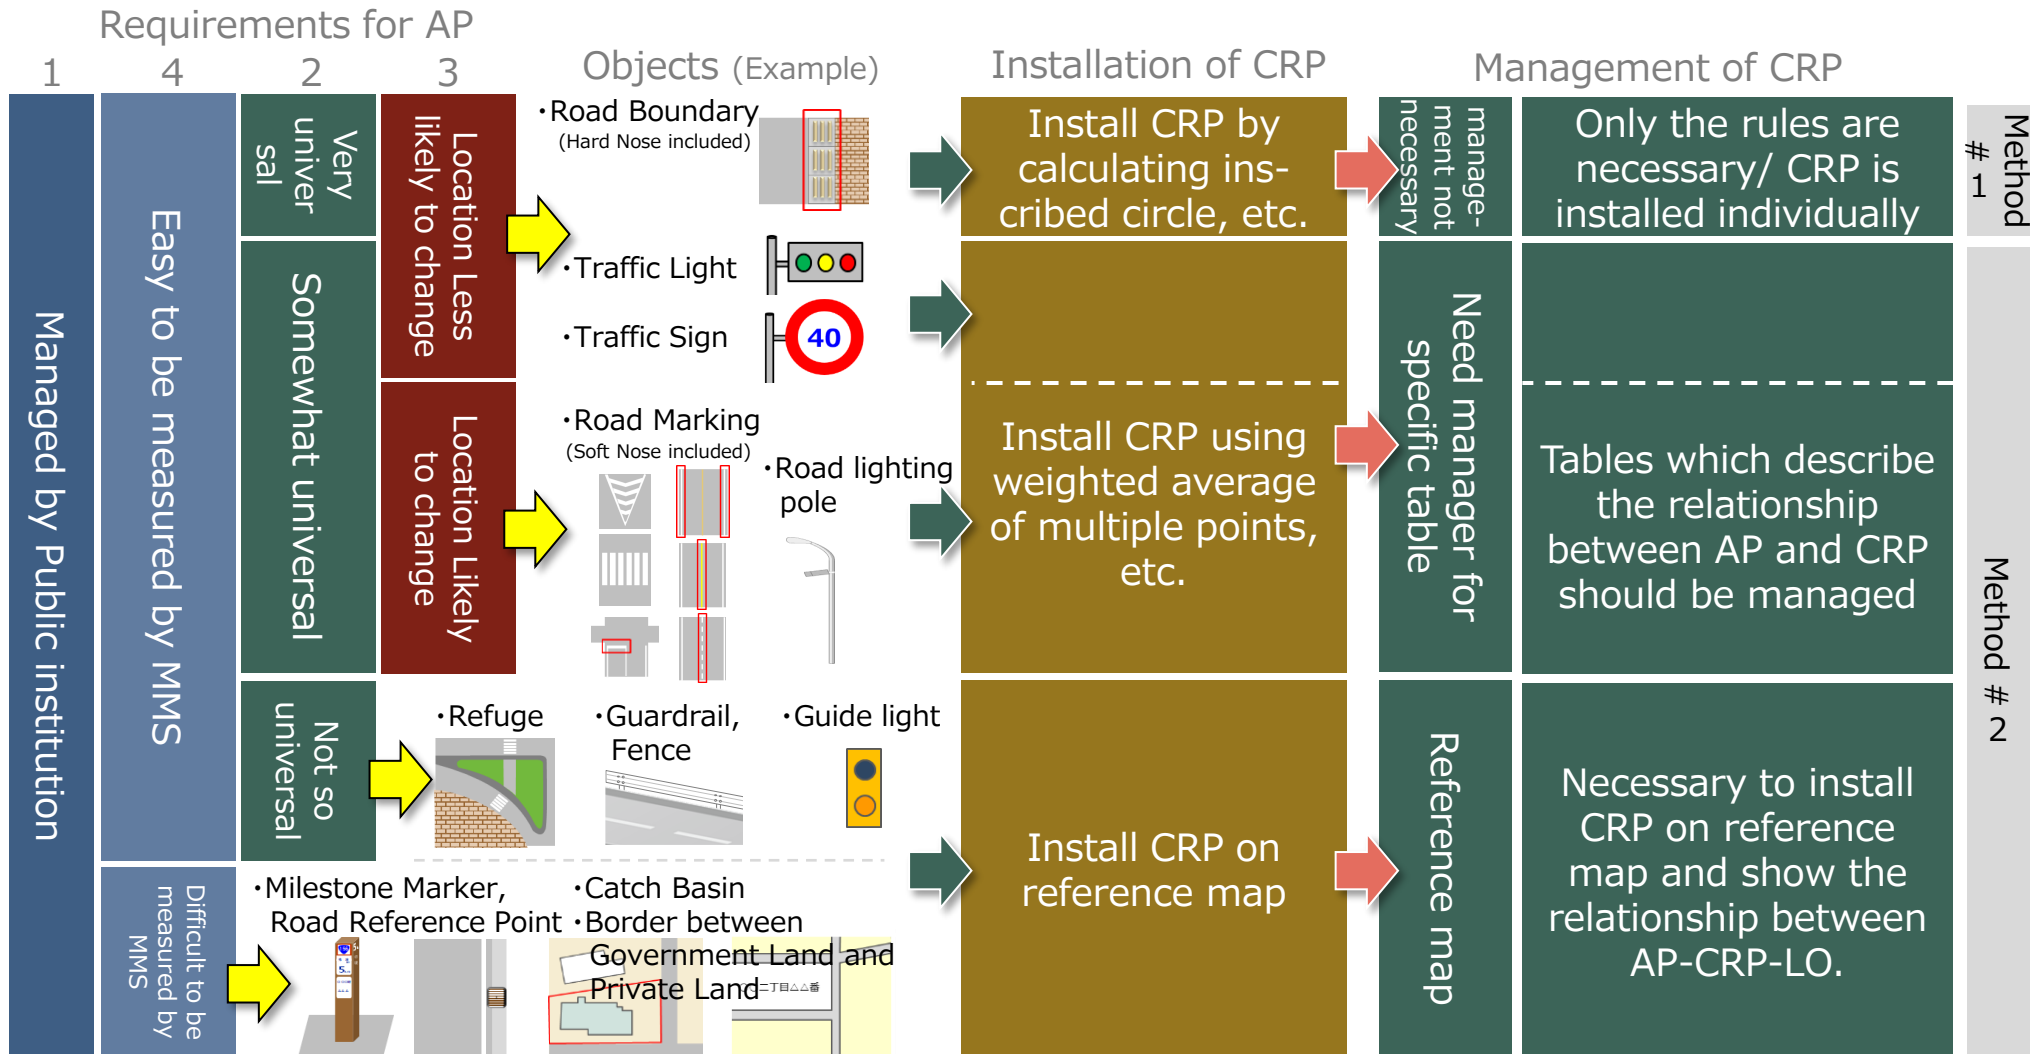

(cd.) Rule for CRP Installation (Draft)

(Example) The center of the inscribed circle of "Road Boundary" is set as CRP

(1) Objects of AP

At branch merging sections or flat crossings, road boundary is identified as AP.

(2) Location of CRP



CRP is set at the center of the largest inscribed circle among the circles which meets both Requirement 1 and Requirement 2:

Requirement 1 - circles which touch the road boundary at 3 points

Requirement 2 - circles which exist inside the branch merging section or flat crossing.

At the point where there are multiple inscribed circles which are close in radius to the largest circle exceptional procedures should be taken:

(e.g.) the gravity of the centers of the circles which is at least $\bigcirc\%$ of the radius of the largest circle is used as the CRP".*

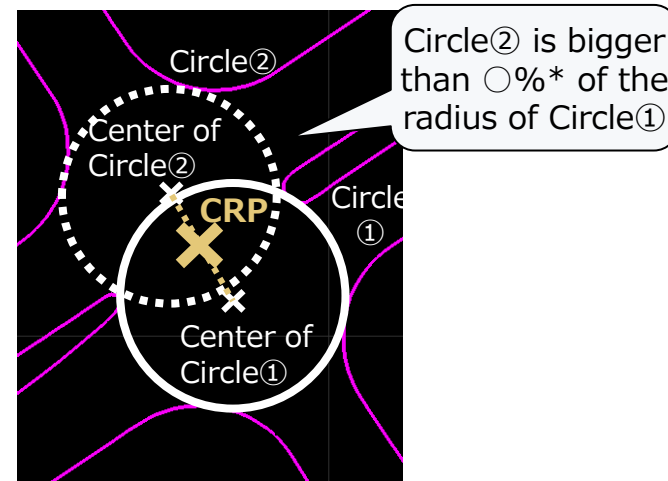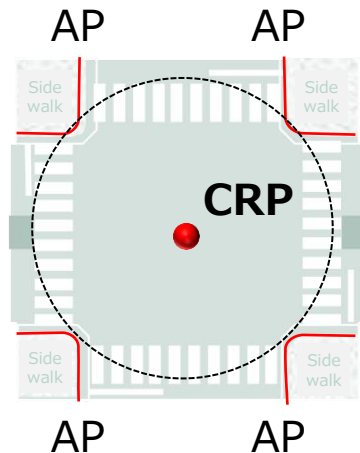

*Details of how to deal with exceptions (e.g., specific numbers for $\bigcirc\%$) will be discussed in the future based on the relative accuracy of the map. 12

(cf.) Group of Objects of AP

Objects (examples)		Road Boundary	Traffic Light	Stop Line	Refuge	Border between Government Land and Private Land		
Image								
Study Results on Requirements	1	Public institution manages the object					Managed by public institution	
	4	Easy to measure	<ul style="list-style-type: none"> • Easy to be measured by MMS • Difficult to be measured by MMS 				Difficult to be measured by MMS	
	2	Universally installed	<ul style="list-style-type: none"> • Very universal • Somewhat universal • Not so universal 	Very universal	Somewhat universal		Not so universal	Very universal
	3	The location does not change in real world	<ul style="list-style-type: none"> • Likely to change • Less likely to change 	Less likely to change		Likely to change	Less likely to change	Less likely to change
Other objects that belong to the same group (examples)		-	-	<ul style="list-style-type: none"> • Channelizing strip • Pedestrian crossing • Roadway outside line • Center line • Traffic lane boundary 	<ul style="list-style-type: none"> • Guardrail, Fence • Guide light 	<ul style="list-style-type: none"> • Location marker, Road reference point • Catch basin • Road edge 		

3. Case Study

Abstract

- Case study for the use cases of CRP is organized, hypothesizing to conduct at the SIP-adus demonstration experiments (Tokyo Waterfront Area Demonstration Experiment).
- Considering the current progress of automated driving technology, **the case studies of Step1 (dropped objects, congestion) and Step2 (merging assistance in expressway) are organized.**
 - ⇒ Case study of Step3 (intersection of local road) will be carried out when the need for precise location representation at intersections of local roads increases due to the progress of automated driving technology.
- The study will be used in future demonstration experiments to verify the effectiveness, etc.

	Step1	Step2	Step3
Needs	Dropped objects and traffic congestion, etc.	Merging assistance in expressway	Intersection of local road
Method =	(Lane number counting) 1 Identify the longitudinal location by using reference points installed at both end and specify lateral location by the lane number.		(Measuring distance) 2 Identify detailed location by the relative location from reference point.
Relative Accuracy of Information (σ)	several - 10 (or more) meters	1 - several meters	Approx. 25cm

Step1 (Dropped objects, congestion)
Case Study:
Road traffic information by lane


Step2 (Merging assistance in expressway)
Case Study:
Merging assistance information

3. Case Study

Step1 (Dropped Objects and Traffic Congestion): Road Traffic Information by Lane

- In the demonstration experiments of SIP-adus (2020) conducted at the Haneda Line and Bayshore Line of Metropolitan Expressway
 - The road traffic information of each lane generated from probe data was distributed to experimental server.
 - The location representation was converted to CRP-based * information and distributed to experimental in-vehicle unit. *The locations of CRPs were not based on AP-based studied in this document.
- As an example of Step1 (dropped objects and traffic congestion), it is possible to distribute information which describes the location by CRP * from the beginning in order to verify the effectiveness, issues, etc. of CRP.

*Verification can be done in 2 ways: 1) installing one CRP for each IC, 2) installing CRPs at any branches or merging points.

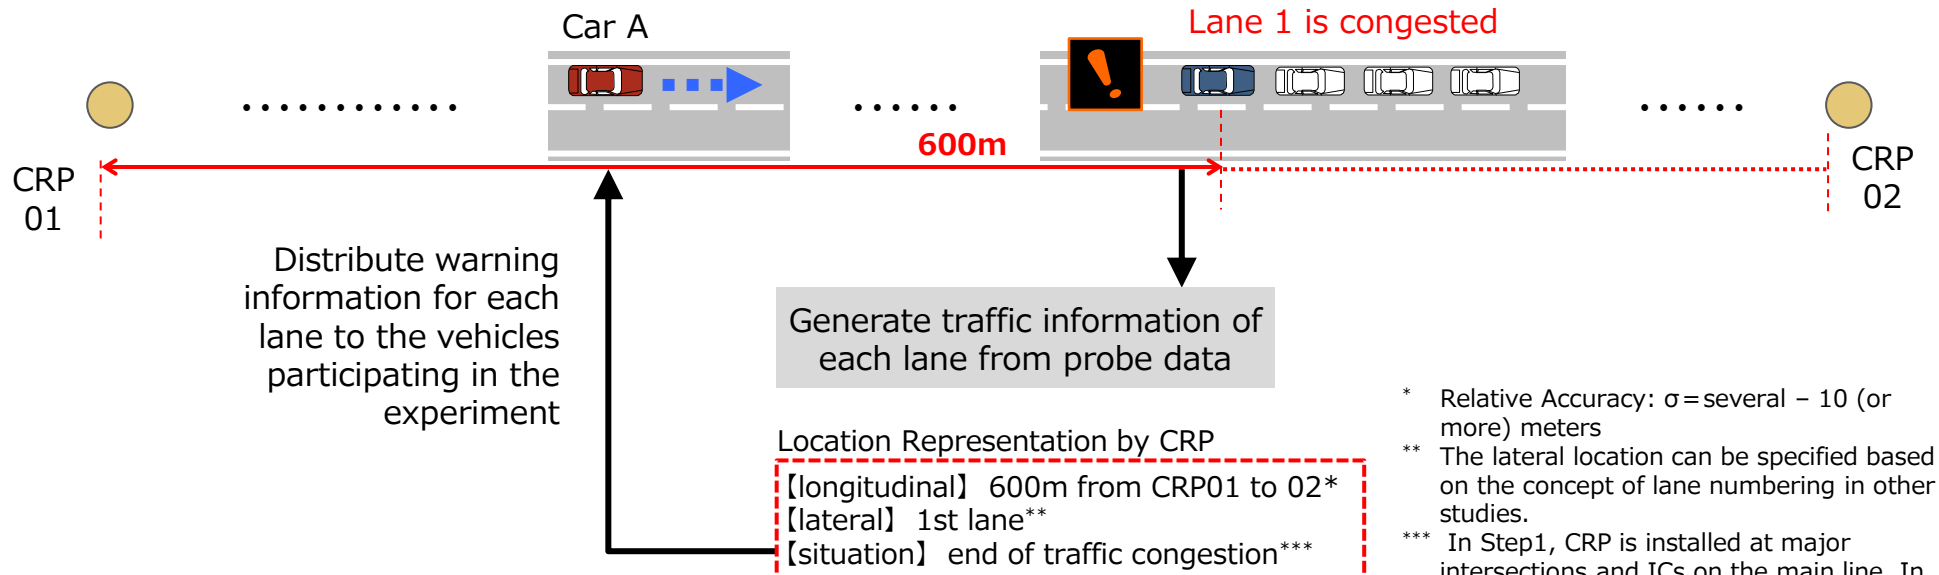

(Figure) Case Study of location Representation by CRP

3. Case Study


Step2 (Merging Assistance in Expressway):

Merging Assistance Information

- In the demonstration experiments of SIP-adus (2019-20) conducted at the Airport West Interchange of Metropolitan Expressway Haneda Line, information about vehicles driving on the main line (merging assistance information) is provided to vehicles driving on the merging lane.


*Traffic conditions on the main line were detected in lateral direction at the specific spot and the arrival time of the confluence is provided to the vehicle on the approach road side.

- As an example of Step2 (merging assistance in expressway), it is possible to distribute information about vehicles traveling on the main line (merging assistance information) to merging vehicles using CRP-based location representation in order to verify the effectiveness and issues of CRP.

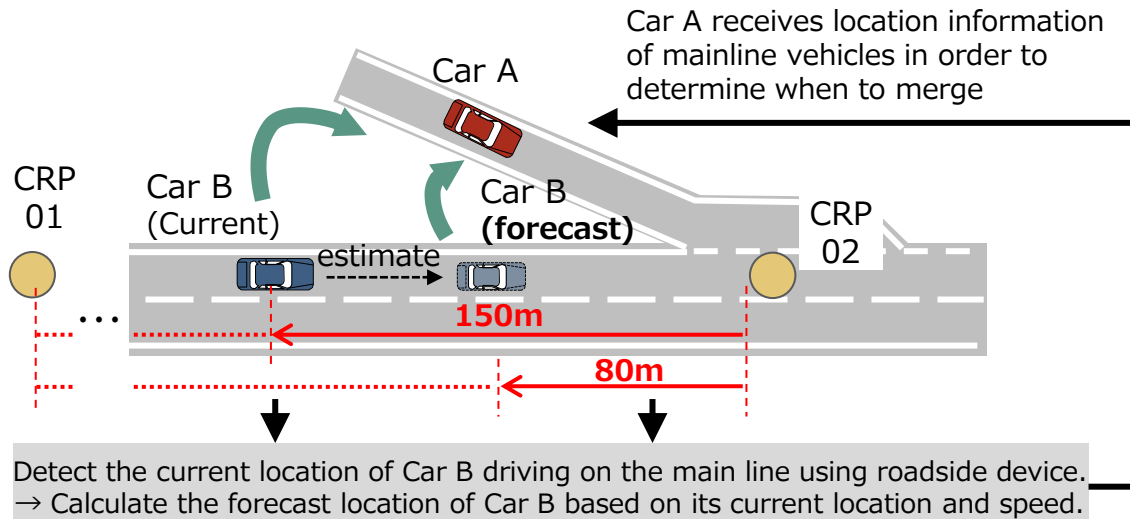

Example of location representation by Method1 (Lane number counting)
(Representation by Method2 (Measuring distance) is also possible)

(Figure) Case Study of location Representation by CRP

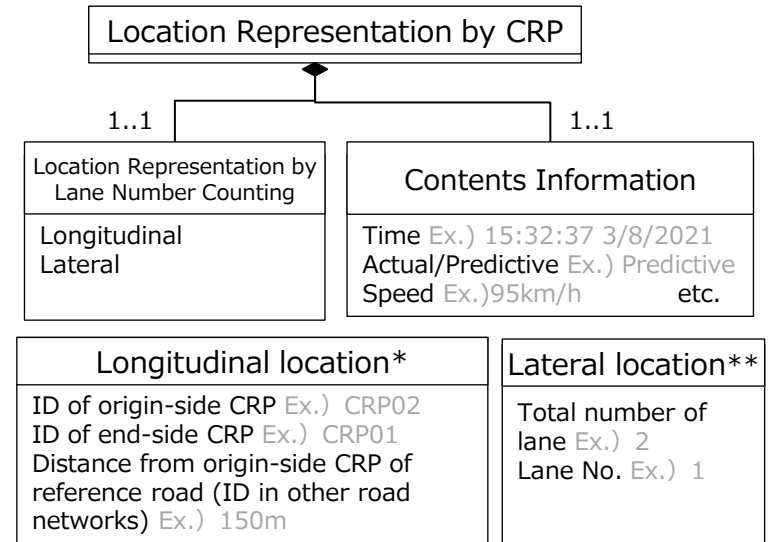

* Example of location representation by Method1 (Lane number counting). In the case of Method2 (Measuring distance from reference point), the data model is different.
** The lateral location is specified based on the concept of lane numbering in other studies.

(Figure) Data Model of Distribution Data (Example)

4. Conclusion

In this study, the basic concept of CRP installation to exchange location information between different HD Maps. In addition, Installation and utilization methods of CRP are presented as case studies based on the implementation items on CRP at each step.

《Basic concept of CRP installation》

	Step1	Step2	Step3	
Needs	Dropped objects and traffic congestion, etc.	Merging assistance in expressway	Intersection of local road	
Method =	(Lane number counting) 1 Identify the longitudinal location by using reference points installed at both end and specify lateral location by showing the lane number.		(Measuring distance) 2 Identify detailed location by the relative location from reference point.	
Relative Accuracy of Information (σ)	several – 10 (or more) meters	1 - several meters	Approx. 25cm	
Implementation Items on CRP	(Issues of HD Maps)→		Determine requirements for mapping rules.	accuracy assurance
	Define how to install CRP. (Issues regarding CRP)			common definitions
	Determine common names or IDs.			

《CRP installation》









 Case Study: Road traffic information by lane Case Study: Merging assistance information

We hope in the future that concrete definition and maintenance methods will be determined considering the demonstration experiments based on the case studies.







(Appendix)








(Appendix) Candidates of AP Object

Objects Name		Traffic Light	Road lighting pole	Refuge	Milestone marker / Road Reference Point	Catch Basin	Traffic Sign
Desk Study Results	<p>Public institution manages the object (Applicable objects are extracted from laws, regulations, design standards, etc.)</p>						
	Image						
	Overview						
	<p>2 Universally installed</p> <ul style="list-style-type: none"> • Very universal • Somewhat universal • Not so universal 	Somewhat universal	Somewhat universal	Not so universal	Somewhat universal	Very universal	Somewhat universal
<p>3 The location does not change in real world</p> <ul style="list-style-type: none"> • Likely to change • Less likely to change 	Less likely to change	Likely to change	Less likely to change	Less likely to change	Less likely to change	Less likely to change	
<p>4 Easy to be measured by MMS</p> <ul style="list-style-type: none"> • Easy to be measured • Difficult to be measured unless obstacles are removed • Difficult to be measured 	Easy to be measured	Easy to be measured	Easy to be measured	Difficult to be measured unless obstacles are removed	Difficult to be measured	Easy to be measured	



(Appendix) Candidates of AP Object (List)

Objects Name		The bottom part of traffic light or traffic sign	Guide light	Pedestrian crossing guidance line (104)	-	Channelizing strip (107)	
				Pedestrian crossing (201)	Stop Line (203)	Approaching safety zone or obstacle on road (208) Channelizing strip (208-2)	
Desk Study Results	1	Public institution manages the object (Applicable objects are extracted from laws, regulations, design standards, etc.)					
		Image					
		Overview					
	2	Universally installed	<ul style="list-style-type: none"> • Very universal • Somewhat universal • Not so universal 	Somewhat universal	Not so universal	Somewhat universal	Somewhat universal
3	The location does not change in real world	<ul style="list-style-type: none"> • Likely to change • Less likely to change 	Likely to change	Likely to change	Likely to change	Likely to change	Likely to change
4	Easy to be measured by MMS	<ul style="list-style-type: none"> • Easy to be measured • Difficult to be measured unless obstacles are removed • Difficult to be measured 	Difficult to be measured unless obstacles are removed	Easy to be measured	Easy to be measured	Easy to be measured	Easy to be measured

(Appendix) Candidates of AP Object (List)

Objects Name		Center line of lane (101)	Lane Boundary (102)	Outside line of lane (103)	Road Boundary	Guardrail, Fence	Border between Government Land and Private Land	"Road Edge" on Fundamental Geospatial Data		
		Center line (105)	Lane Boundary (206) Vehicle traffic zone (109)	Side strip (108-4)						
Desk Study Results	1	Public institution manages the object (Applicable objects are extracted from laws, regulations, design standards, etc.)								
		Image								
		Overview								
				Demarcated public-private boundary	Road zone defined by Road Act					
2	Universally installed <ul style="list-style-type: none"> • Very universal • Somewhat universal • Not so universal 	Somewhat universal	Somewhat universal	Somewhat universal	Very universal	Not so universal	Very universal	Very universal		
3	The location does not change in real world <ul style="list-style-type: none"> • Likely to change • Less likely to change 	Likely to change	Likely to change	Likely to change	Likely to change	Likely to change	Less likely to change	Less likely to change		
4	Easy to be measured by MMS <ul style="list-style-type: none"> • Easy to be measured • Difficult to be measured unless obstacles are removed • Difficult to be measured 	Easy to be measured	Easy to be measured	Easy to be measured	Easy to be measured	Easy to be measured	Difficult to be measured	Difficult to be measured		

(Appendix) Method of Installing CRP

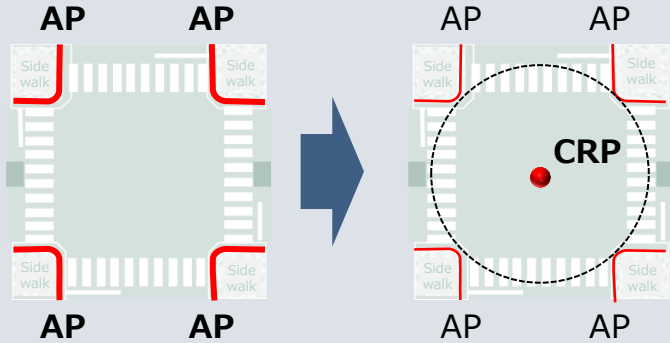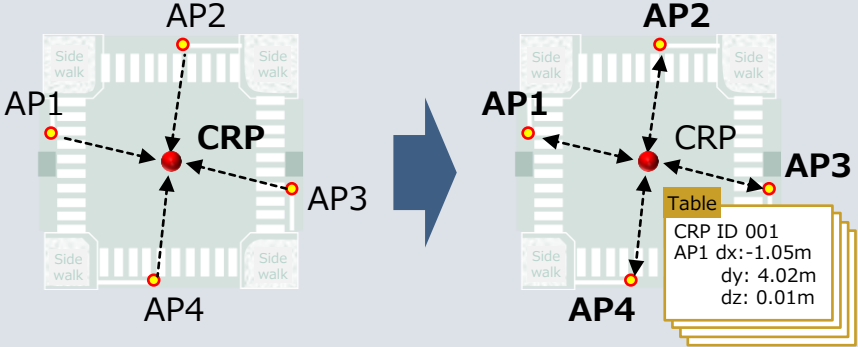	Installation based on the rule (Method #1)	Installation based on the table (Method #2)
<p>Outline</p>	<ol style="list-style-type: none"> 1. Decide the AP location 2. Automatically calculate CRP from AP <p>⇒ Each map sets AP & CRP based on the rule</p>  <ol style="list-style-type: none"> 1. Each map confirms the AP location. (e.g. Road Boundary) 2. Each map automatically calculates CRP from AP based on the rule. (e.g. center of inscribed circle) 	<ol style="list-style-type: none"> 1. CRP is set up by an initial installer 2. Set up a table for relative coordinate of CRP & AP <p>⇒ Each map sets AP and CRP based on the table</p> <p>※It is necessary to maintain not only the table but also the map itself as reference, depending on the type of AP object,</p>  <ol style="list-style-type: none"> 1. An initial installer automatically calculates CRP from AP based on the rule. (e.g. weighted average of AP) 2. Set up a table for relative coordinate of CRP and all AP.
<p>Advantage/ disadvantage</p>	<ul style="list-style-type: none"> (+) Low cost of managing CRP (+) Operation is easier; even if AP moves, only CRP on each map needs to be updated based on the rule (-) If AP is the object likely to change its location, CRP will be also likely to change (-) The rule which are applicable to any location is necessary 	<ul style="list-style-type: none"> (+) Even if AP moves, CRP does not move (+) LO can be set as (a part of) AP (-) The initial installer of table is necessary, which requires the cost for managing tables (-) The management of AP on the table is necessary (e.g. recording which traffic light is used as AP, updating the location of AP after AP moved)

※It is possible to combine Method #1 and Method #2 when setting up CRP.